

1. Features

- Output current in excess of 1A
- Output voltages of 5V
- Thermal overload protection
- Output transition SOA protection
- 2% output voltage tolerance
- Guaranteed in extended temperature range

2. Absolute maximum ratings


Table1: Maximum ratings($T_A=25\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Rating	Unit
DC input voltage ($V_o=5\sim 18$)	V_i	35	V
Thermal resistance junction-case	R_{oJC}	5	$^{\circ}\text{C}/\text{W}$
Thermal resistance junction-ambient	R_{oJA}	65	$^{\circ}\text{C}/\text{W}$
Operating juntion temperature range	T_{oPR}	0~125	$^{\circ}\text{C}$
Storage temperature range	T_{stg}	-65~150	$^{\circ}\text{C}$

3. Pin information & Package information

Table2: Pin information & Package information

Pin	Description
1	Input
2	GND
3	Output

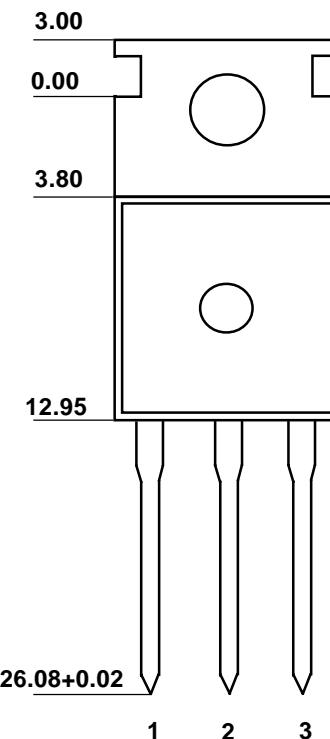

4.Electrical characteristics

Table3: Electrical characteristics($0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_i=11\text{V}$, $C_l=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Output voltage	V_o	$T_j=25^{\circ}\text{C}$ $5.0\text{mA} \leq I_o \leq 1.0\text{A}, P_D \leq 15\text{W},$ $7.0\text{V} \leq V_D \leq 20\text{V}$	4.8 4.75	5.0 5.0	5.2 5.25	V
Line regulation	ΔV_o	$T_j=25^{\circ}\text{C}, 7.0\text{V} \leq V_i \leq 25\text{V}$ $T_j=25^{\circ}\text{C}, 9.0\text{V} \leq V_i \leq 13\text{V}$		4.0 1.6	100 50	mV
Load regulation	ΔV_o	$T_j=25^{\circ}\text{C}, 5.0\text{mA} \leq I_o \leq 1.5\text{A}$ $T_j=25^{\circ}\text{C}, 250\text{mA} \leq I_o \leq 750\text{mA}$		9 4	100 50	mV
Quiescent	I_q	$T_j=25^{\circ}\text{C}$		5.0	8	mA
Quiescent current change	ΔI_q	$5.0\text{mA} \leq I_o \leq 1.0\text{A}$ $7.0\text{V} \leq V_i \leq 25\text{V}$		0.03 0.3	0.5 1.3	mA
Output voltage drift	$\Delta V_o / \Delta T$	$I_o=5\text{mA}$		-0.8		mV/ °C
Output noise voltage	V_n	$T_A=25^{\circ}\text{C}, 10\text{Hz} \leq f \leq 100\text{KHz}$		42		uV
Supply voltage rejection	RR	$f=120\text{Hz}, 120\text{V} \leq V_i \leq 18\text{V}$	62	73		dB
Dropout	V_d	$I_o=1\text{A}, T_j=25^{\circ}\text{C}$		2		V
Output resistance	R_o	$f=1\text{KHz}$		15		mohm
Short circuit current	I_{sc}	$V_i=35\text{V}, T_j=25^{\circ}\text{C}$		0.23		A
Short circuit peak current	I_{px}	$T_j=25^{\circ}\text{C}$		2.2		A